


System Components:

Positive Displacement Pumps

Positive Displacement Pumps:

- Hydrator piston pumps do not allow air to directly touch the product so beverage taste is never compromised
- Positive displacement pumps reset fully before dispensing a second drink, which makes them the most accurate pump on the market
- Easybar pumps are demand pumps – they remain closed until signaled to pour eliminating the chance of loss of liquor reserve in the event of a leak
- Standard pump rail includes 16 pumps

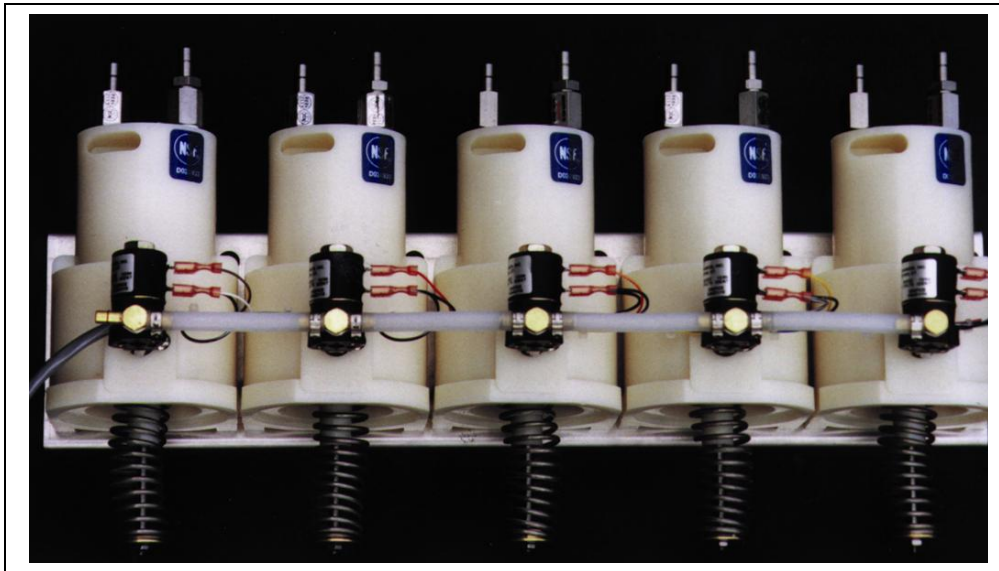

DIMS: 16-PUMP RAIL: 60"W x 6"D x 12"H
INDIVIDUAL PUMP: 4"W x 5 1/2"D x 12" H
Easybar CLCSIIT is certified to ANSI/NSF Standard 18 - Jan 2008
